
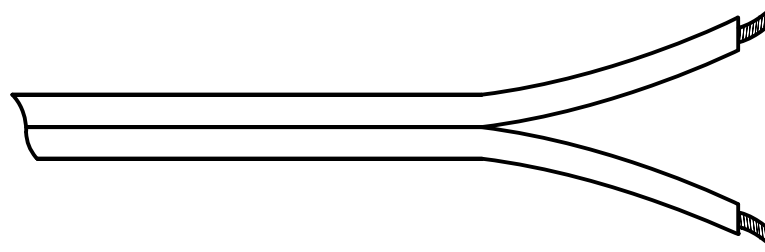


Zeichnung
Drawing

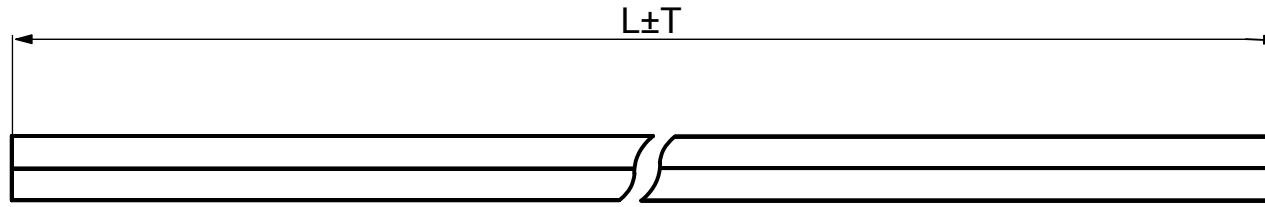

Nr. / No.	Länge / Length (m)	Farbe / Color
15018	100±2	TRANSPARENT
15022	100±2	ROT/SCHWARZ
27521	100±2	WEISS
67717	25±0.5	TRANSPARENT
67718	50±1	TRANSPARENT
67719	10±0.1	TRANSPARENT
67728	10±0.1	ROT/SCHWARZ
67730	25±0.5	ROT/SCHWARZ
67731	50±1	ROT/SCHWARZ
67744	10±0.1	WEISS
67745	25±0.5	WEISS
67746	50±1	WEISS

Lautsprecherkabel CCA

- Querschnitt: 2 x 0.75 mm²
- Innenleiter: CCA; 2x24 Adern / 0.20 mm
- Isolation: PVC
- Kennzeichnung: Plus/Minus
- Temperaturbereich: -20 °C ~ +100 °C
- max. Spannung: 500 V
- RoHS-konform

Speaker cable CCA

- Cross section: 2 x 0.75 mm²
- Inner conductor: CCA; 2x24 Adern / 0.20 mm
- Insulation: PVC
- Marking: Plus/Minus
- Temperature range: -20 °C ~ +100 °C
- max. Voltage: 500 V
- RoHS compliant

Änderungen

Datum	Name	gez.:	Datum	Name	Bezeichnung	Blatt
		gez.:	17.09.2015	tf	LSK 2X0.75 CCA	von
		gepr.:	17.09.2015	tf		
		Norm:			Zeichnungs-Nr.:	
Änderungen vorbehalten / Subject to change						

